

产品特点


- ◆ 优质合金钢材质，性能稳定可靠 胶封，拉向或压向承载，
- ◆ 防护等级IP67，可用于户外环境
- ◆ 适用于吊钩秤、机改秤、料斗秤等各类电子称重设备
- ◆ 表面处理采用喷丸镀镍工艺，镀层附率提升50%
- ◆ s型结构，拉力两用，抗偏载强，安装灵活
- ◆ 采用四芯屏蔽电缆线，抗干扰强




技术指标

量程	单位	25kg/50kg/100kg/150kg/200kg/250kg/300kg/500kg/600kg/750kg/1t/1.5t/2t/2.5t/3t/5t/ 7.5t/10t/15t/20t/30t 100lb/150lb/200lb/250lb/300lb/500lb/750lb/1Klb/1.5Klb/2Klb/2.5Klb/3Klb/5K/10K/15K/20K
精度	/	C3
综合误差	%FS	≤ ±0.020
蠕变	%FS/30min	≤ ±0.016
温度对输出灵敏度的影响	%FS/10°C	≤ ±0.011
温度对零点输出的影响	%FS/10°C	≤ ±0.015
输出灵敏度	mV/V	2.0±0.004
输入阻抗	Ω	400±3.5
输出阻抗	Ω	351±2.0
绝缘阻抗	MΩ	≥ 5000(50VDC)
零点输出	%FS	≤ ±1.0
温度补偿范围	°C	-10 ~ +40
允许使用温度范围	°C	-35 ~ +70
推荐激励电压	V	5 ~ 12(DC)
最大激励电压	V	18(DC)
安全过载范围	%FS	150

外型尺寸 mm (inch)

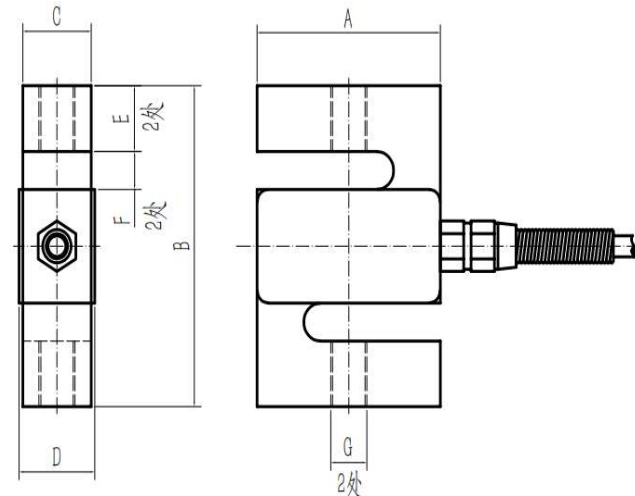

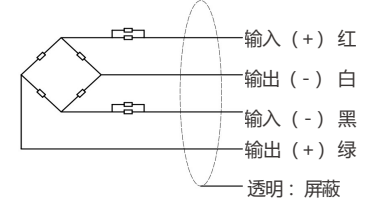

量程	A	B	C	D	E	F	G
25kg~150kg	50.8	76.2	19	21	15.7	/	M10×1.5
200kg~750kg	50.8	76.2	19	21	/	9	M12×1.75
1t~1.5t	50.8	76.2	25.4	27.4	/	9	M12×1.75
2t~5t	76.2	101.6	25.4	27.4	20	/	M20×1.5
7.5t~10t	125	175	50	52	/	20.5	M33×3
15t~20t	160	200	60	62	/	21.5	M42×3
30t	190	230	80	82	/	25	M42×3
100lb~300lb	50.8	63.5	19	21	/	8.25	1/4-28UNF
500lb	50.8	63.5	19	21	/	8.25	1/2-20UNF
750lb~1.5klb	50.8	63.5	19	21	10.2	/	1/2-20UNF
2klb~2.5klb	50.8	63.5	25.4	27.4	10.2	/	1/2-20UNF
3klb	76.2	101.6	25.4	27.4	15.2	/	1/2-20UNF
5klb~10klb	76.2	101.6	25.4	27.4	15.2	/	3/4-16UNF
15klb~1.5klb	101.6	139.7	31.8	33.8	31	/	1-14UNF
20klb	127	177.8	50.8	52.8	40	/	5/4-12UNF